

SPECIFICATIONS:

- FREQUENCY: 0.5 GHz TO 18 GHz
- INSERTION LOSS: REFLECTIVE: 7.0db
 ABSORPTIVE: 7.5db
- ISOLATION: 0.5 GHz TO 2 GHz: 60db
 2 GHz TO 18 GHz: 70db
- VSWR: REFLECTIVE IN/OUT: 2.0:1
 ABSORPTIVE IN/OUT: 2.0:1
 ABSORPTIVE OUT/OFF: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAX.
 FALL: 10ns TYPICAL, 15ns MAX.
 DELAY ON: 75ns TYPICAL, 150ns MAX.
 DELAY OFF: 75ns TYPICAL, 150ns MAX.
- POWER INPUT: (CW)+20dBm (STANDARD), +10 dBm (HIGH SPEED)
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 usec
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- POWER SUPPLY: +5V @ 1 AMP MAX.
 -5V @ 200mA MAX.(REFLECTIVE)
 250mA MAX.(ABSORPTIVE/NON-REFLECTIVE)

OPTIONS:

- INDEPENDENT CONTROL WITH SOLDER PIN STANDARD
- DEC-MP: 5 BIT DECODER WITH MULTIPIN
- DEC-SP: 5 BIT DECODER WITH SOLDER PIN
- MP-IND: INDEPENDENT CONTROL WITH MULTIPIN
- 1DM18: 10 MHz TO 18 GHz (INSERTION LOSS INCREASES
 BY 1.5db AT 10 MHz AND 0.5db AT 18 GHz)
- 100M18: 100 MHz TO 18 GHz (INSERTION LOSS INCREASES
 BY 1.5db AT 100 MHz AND 0.5db AT 18 GHz)
- 118: 1 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 218: 2 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 412: 4 GHz TO 12.4 GHz (NO CHANGE IN INSERTION LOSS)
- 618: 6 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 1218: 12 GHz TO 18 GHz (NO CHANGE IN INSERTION LOSS)
- 100M20: 100 MHz TO 20 GHz (INSERTION LOSS INCREASES
 BY 1.5db AT 100 MHz AND 1.0db AT 20 GHz)
- 220: 2 GHz TO 20 GHz (INSERTION LOSS INCREASES
 BY 1.0db AT 20 GHz)
- 1020: 10 GHz TO 20 GHz (INSERTION LOSS INCREASES
 BY 1.0db AT 20 GHz)
- B01: -12V POWER SUPPLIES
- B02: -15V POWER SUPPLIES
- B03: REVERSE LOGIC "1"=ON "0"=OFF
- B04: DRIVERLESS, CURRENT CONTROLLED
- B05: HIGH SPEED, TURNON/TURNOFF 20 nsec MAXIMUM
 WHEN APPLICABLE OR OPTION HS
- B06: HIGH POWER - SPECIFY CW POWER, PEAK POWER, PULSE WIDTH,
 DUTY CYCLE, RF FREQUENCY AND BANDWIDTH
- B07: CUSTOM DESIGNED PRODUCT- SPECIFY INITIALS OF CUSTOMER
- B08: LOW VIDEO TRANSIENTS - SPECIFY VIDEO BANDWIDTH
- B09: LOW INSERTION LOSS VERSION
- B10: HIGHER ISOLATION VERSION


ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
 -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 106C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.020
 X.XXX ±0.010

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	ORIGINAL RELEASE	7/25/98	

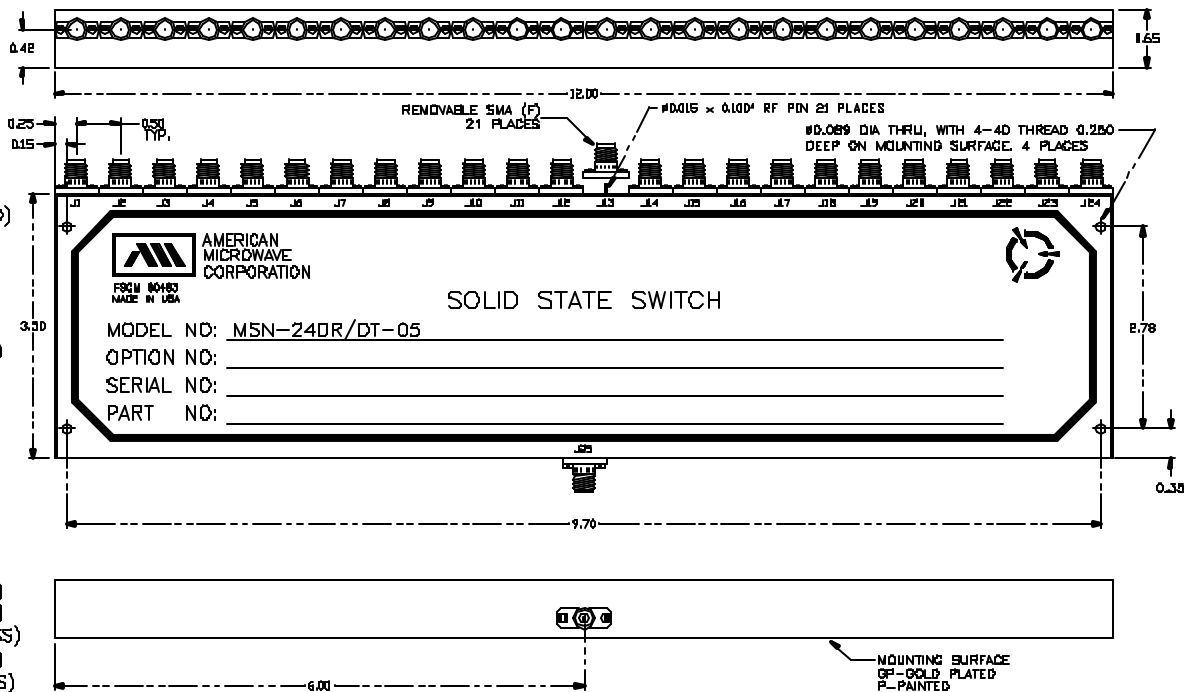

NOTE:
 DR=WITH DRIVER, REFLECTIVE
 DT=WITH DRIVER, NON-REFLECTIVE/ABSORPTIVE

PART NO.		AMERICAN MICROWAVE CORPORATION FREDERICK, MARYLAND		
APPROVALS	DATE	TITLE OUTLINE DRAWING MSN-20DR/DT-05-MP-IND REFLECTIVE OR NON-REFLECTIVE/ABSORPTIVE SOLID STATE SWITCH		
DRAWN <i>WSP</i>	7/25/98	SIZE	FRM NO. A 60483	DWG NO. 100-4459-2
CHECKED		SCALE	N/S	REV. -
ISSUED				SHEET 1 of 1